



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 085 500 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
21.03.2001 Bulletin 2001/12

(51) Int. Cl.<sup>7</sup>: G10L 15/22

(21) Application number: 00119391.1

(22) Date of filing: 12.09.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 13.09.1999 JP 25858599

(71) Applicant:  
MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventor: Henmi, Hidemichi  
Otsu-shi, Shiga-ken (JP)


(74) Representative:  
Lang, Johannes, Dipl.-Ing. et al  
Bardehle Pagenberg Dost Altenburg Geissler  
Isenbruck,  
Postfach 86 06 20  
81633 München (DE)

(54) Timing between commands of a voice controlled device

(57) A device recognition device (VR1) for controlling a target device (800) with a command uttered by a user is provided with a voice receiver (100) for receiving a voice, a controller (200) for controlling the target device (800) based on the detected command, and an enabler (300) for detecting a keyword in the voice (Sv) via the voice receiver (100), and after the detection,

enabling the controller (200) to control the target device (800) for a predetermined command input period. With such voice recognition device, the command is limitedly accepted only for a predetermined period, and thus the device may not confuse with a user's command with ambient noise, sound, and the like.

FIG. 1

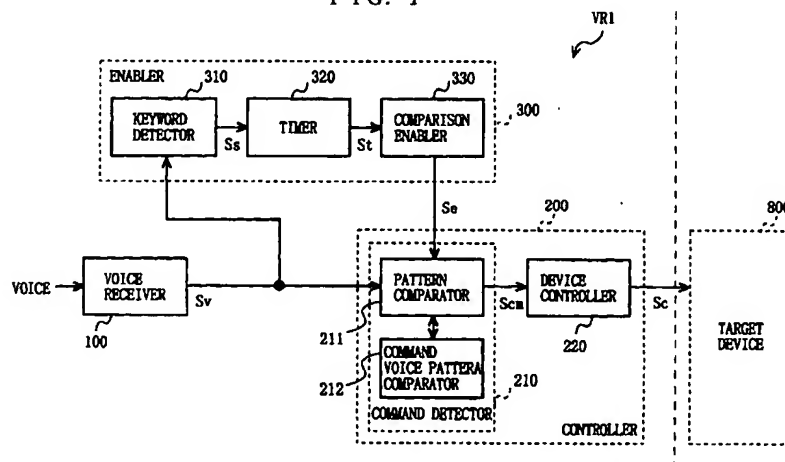

EP 1 085 500 A2

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

**[0001]** The present invention relates to voice recognition devices and methods for device control with voice and, more specifically, to a voice recognition device and method which work well for controlling a sound output device such as television.

#### Description of the Background Art

**[0002]** So far, device control with buttons provided on devices and remote controllers has been prevalent. Recently, with the progression of voice recognition technology, device control with voice became popular for mobile phones and car navigation systems, for example.

**[0003]** Referring to FIG. 11 for block diagram, described below is the configuration of a conventional voice recognition device, which is connected to a target device for control.

**[0004]** As shown in FIG. 11, a voice recognition device VRC includes a voice receiver 100 and a controller 200. The controller 200 is connected to a target device 800, and controls the operation thereof. The controller 200 includes a command detector 210 and a device controller 220. The command detector 210 is provided with a pattern comparator 211 and a command voice pattern storage 212. Described below is the operation of the voice recognition device VRC.

**[0005]** Once a user uttered a predetermined command to control the target device 800, the commanded voice is converted into a voice signal Sv by the voice receiver 100. The voice signal Sv is then applied to the command detector 210, where the command in the voice signal Sv is detected. More specifically, the command voice pattern storage 212 is previously provided with a plurality of sample command voice patterns for the purpose of controlling the target device 800. The pattern comparator 211 compares those with a sound pattern of the voice signal Sv for any matching, and if any, a command signal Scm corresponding to the detected command is outputted therefrom. Based on the command indicated by the command signal Scm, the device controller 220 generates a control signal Sc for controlling the target device 800.

**[0006]** Such conventional voice recognition device, however, is always in a ready state for voice commands. Therefore, even when the user utters no command, the device may erroneously recognize ambient noise therearound, typified by conversations, as the user's command, and result in unintended malfunction. Assuming that the target device for control is a television which constantly outputs sound, the voice recognition device is more likely to confuse the sound therefrom with the

user's command.

**[0007]** In order to get around such problem, disclosed in Japanese Patent Laid-Open Publication No. 61-225996 (86-225996) is a method of controlling voice recognition processing with the flick of a switch. With this method, the voice recognition processing is carried out only when the user utters his/her command with the switch turned on, and accordingly the possibility for the erroneous recognition can be reduced.

**[0008]** With such method, however, the user has to turn on the switch to give his/her command. Therefore, the user finds it inconvenient if he/she cannot keep the switch at hand or is busy with hands to turn on the switch. Moreover, this method is not that useful for a case where the target device is exemplarily a television which constantly outputs sound. This is because, as described above, the sound from the television is inputted together with the user's command while the switch is on, and thus leads to erroneous recognition.

### SUMMARY OF THE INVENTION

**[0009]** Therefore, an object of the present invention is to provide a voice recognition device and method for device control with voice in a simple operation, preventing erroneous recognition caused by ambient noise, and the like, around the device. Another object of the present invention is to provide a voice recognition device and method for controlling, with voice, a sound output device such as television, lessening erroneous recognition caused by sound from the sound output device.

**[0010]** The present invention has the following features to attain the objects above.

**[0011]** One aspect of the present invention is directed to a voice recognition device for controlling a target device with a command, comprising: a voice receiver for receiving a voice; a controller for detecting the command from the voice provided by the voice receiver, and controlling the target device based on the detected command; and an enabler for detecting a predetermined keyword in the voice provided by the voice receiver, and enabling the controller to control the target device for a predetermined command input period.

**[0012]** As described above, in the above-described aspect, a command is accepted only for a predetermined length of time after a keyword is inputted. Therefore, erroneous recognition can be prevented. Moreover, as a user utters the keyword, there is no more need to actuate a button, and the like, for control device, whereby device control is achieved even if the user is busy with hands.

**[0013]** These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0014]**

FIG. 1 is a block diagram showing the configuration of a voice recognition device according to a first embodiment of the present invention;

FIG. 2 is a flowchart for the operation of an enabler 300 of the first embodiment;

FIG. 3 is a block diagram showing the configuration of a voice recognition device according to a second embodiment;

FIG. 4 is a flowchart for the operation of an enabler 301 of the second embodiment;

FIG. 5 is a block diagram showing the configuration of a voice recognition device according to a third embodiment;

FIG. 6 is a flowchart for the operation of the enabler 300 and a volume controller 400 in the third embodiment;

FIG. 7 is a block diagram showing the configuration of a voice recognition device according to a fourth embodiment;

FIG. 8 is a flowchart for the operation of the enabler 300 and a sound output component suppresser 500 in the fourth embodiment;

FIG. 9 is a block diagram showing the configuration of a voice recognition device according to a fifth embodiment;

FIG. 10 is a flowchart for the operation of the enabler 301, the volume controller 400, and the sound output component suppresser 500 in the fifth embodiment; and

FIG. 11 is a block diagram showing the configuration of a conventional voice recognition device.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0015]** With reference to the accompanying figures, described below by way of embodiments is a voice recognition device of the present invention for device control with voice, capable of lessening erroneous recognition.

(First Embodiment)

**[0016]** By referring to FIG. 1 for block diagram, described below is the configuration of a voice recognition device of a first embodiment, being connected to a target device for control, and preventing erroneous recognition by accepting a command only for a predetermined period after receiving a keyword. Herein, any constituent found in FIG. 11 is denoted by the same reference numeral.

**[0017]** As shown in FIG. 1, a voice recognition device VR1 of the first embodiment includes the voice receiver 100, the controller 200, and an enabler 300.

The controller 200 is connected to both the voice receiver 100 and the enabler 300, and generates a control signal Sc for controlling the target device 800. The controller 200 includes the command detector 210 and the device controller 220. The command detector 210 is provided with the pattern comparator 211 and the command voice pattern storage 212. The enabler 300 includes a keyword detector 310, a timer 320, and a comparison enabler 330.

**[0018]** Described next below is the operation of the voice recognition device VR1.

**[0019]** The voice receiver 100 converts an incoming voice into a voice signal Sv. The voice signal Sv is applied to the controller 200 and the enabler 300. In the controller 200, the command detector 210 detects the command in the voice signal Sv. To be more specific, the command voice pattern storage 212 is previously provided with a plurality of sample command voice patterns for the purpose of controlling the target device 800. The pattern comparator 211 compares those with a sound pattern of the voice signal Sv for any matching, and if any, a command signal Scm corresponding to the detected command is outputted therefrom. Based on the command signal Scm, the device controller 220 generates a control signal Sc so as to control the target device 800. Note herein that, the controller 200 can control the target device 800 only for a command input period, which is determined by the enabler 300. Described next is the operation of the enabler 300.

**[0020]** The keyword detector 310 detects a keyword from the voice signal Sv provided by the voice receiver 100, and then outputs a start signal Ss. This keyword is predetermined as a cue for command input, and is uttered before a command. In response to the start signal Ss, the timer 320 starts counting a predetermined length of time. The timer 320 then outputs a time signal St indicating whether or not the timer 320 is in its counting process. Based on the time signal St, the comparison enabler 330 keeps outputting an enable signal Se for the counting duration of the timer 320 so as to enable the operation of the pattern comparator 211. As such, the counting duration of the timer 320 is the above-described command input period. In the first embodiment, the keyword detector 310 may be functionally substituted by the command detector 210. In detail, the command voice pattern storage 212 may be previously provided with a voice pattern of the keyword in addition to sample command voice patterns. Based on those, the pattern comparator 211 may detect the keyword from the voice signal Sv, and then output the start signal Ss to the timer 320.

**[0021]** By referring to FIG. 2 for flowchart, the enabler 300 is described for its operation, which is the characteristics of the present invention. Although the components in this embodiment can be implemented by hardware, it is now assumed that those are exemplarily implemented by software. Accordingly, shown in the flowchart in FIG. 2 is the operation of a CPU, which is

not shown.

**[0022]** Once the voice recognition processing was started, the voice receiver 100 converts an incoming voice into a voice signal Sv. In the enabler 300, the timer 320 is initialized (S11) to be ready for an incoming keyword (S12). After the keyword is detected in the voice signal Sv, the command input period is started to be counted, and command comparison operation in the pattern comparator 211 is enabled (S13). While the command input period is counted (S14), the target device 800 is under the control of the controller 200. Once the command input period was thoroughly counted by the timer 320, the command comparison operation in the pattern comparator 211 is disabled (S15), and the timer 320 is initialized (S11) to be ready for the keyword again (S12).

**[0023]** As is known from the above, the voice recognition device of the first embodiment does not accept any command until a keyword is detected in the voice signal Sv. Therefore, for device control, the user needs to utter a keyword first, and then a command during the command input period. If the user does not utter the command in the command input period, the command is not accepted unless the keyword is uttered again.

**[0024]** Herein, if the keyword is common in daily life, the voice recognition device may confuse the keyword with conversations therearound, and thus the device mistakenly starts to accept command. By taking this into consideration, the keyword is preferably a magic spell or nickname, being original and uncommon in the daily life.

**[0025]** As described in the foregoing, in the first embodiment, a user has to utter a keyword first and then a command for device control. In this manner, the voice recognition device is prevented from erroneously recognizing conversations therearound, sound from a target device, etc., as the user's command even when the user utters no command.

(Second Embodiment)

**[0026]** By referring to FIG. 3 for block diagram, described below is the configuration of a voice recognition device VR2 according to a second embodiment, being connected to a target device for control, and sparing the user the trouble of uttering the same keyword every time the command input period is over. The voice recognition device VR2 is almost the same as that in the first embodiment except a correspondence detector 340, which is newly provided. Thus, any identical component is under the same reference numeral, and is not described again. An enabler 301 is provided with the keyword detector 310, the timer 320, and the comparison enabler 330 as in the first embodiment, and is newly provided with the correspondence detector 340. The correspondence detector 340 is connected to both the pattern comparator 211 and the timer 320.

**[0027]** Described below is the operation of the voice

recognition device VR2 only for any component different from the device in the first embodiment.

**[0028]** In a similar manner to the first embodiment, once the keyword detector 310 detected a keyword, the timer 320 starts counting the command input period so that the operation of the pattern comparator 211 is enabled. The comparison result is conveyed by the command signal Scm to the device controller 220 and the correspondence detector 340. Based on the command signal Scm, the device controller 220 controls the target device 800. The correspondence detector 340 outputs a reset signal Sr responding to the command signal Scm, and then resets the timer 320. Thereafter, the timer 320 starts counting the time from 0.

**[0029]** By referring to FIG. 4 for flowchart, the operation of the enabler 301 is now described. Herein, any step identical in the flowchart of FIG. 2 is provided with the same step number, and is not described again.

**[0030]** The command input period which is equal to the counting duration of the timer 320 is constant in the first embodiment. In the second embodiment, however, the voice recognition device accepts a command (S21) while the timer 320 is counting the time (S14), and if any command is detected in the meantime, the timer 320 is caused to start counting the time again from 0 by the reset signal Sr (S22). In other words, every time a command is detected in the command input period, the timer 320 starts counting the time from 0. With the command input period lengthened as such, the user has no more need to utter the same keyword every time the command input period is over.

**[0031]** Herein, the correspondence detector 340 is so configured as to receive the command signal Scm from the pattern comparator 211 and output the reset signal Sr to the timer 320. Such configuration is not restrictive, and the pattern comparator 211 may functionally substitute therefor by outputting the reset signal Sr to the timer 320 when detecting any command.

**[0032]** As described in the foregoing, in the second embodiment, the command input period is automatically lengthened for each command. Therefore, the command input period never be over until the user finishes successively uttering a plurality of commands. In such manner, the user can spare the trouble of uttering the same keyword every time the command input period is over.

(Third Embodiment)

**[0033]** By referring to FIG. 5 for block diagram, described below is the configuration of a voice recognition device VR3 according to a third embodiment, being connected to a target device including a sound output part, and effectively reducing erroneous recognition by turning down sound output therefrom for the command input period after detecting a keyword. The voice recognition device VR3 is almost the same as that in the first embodiment except a volume controller 400, which is

newly provided. And a target device 900 connected thereto is additionally provided with a sound output part 910. Thus, any identical component is under the same reference numeral, and is not described again. The volume controller 400 is connected to both the timer 320 and the sound output part 910 in the target device 900.

**[0034]** Described below is the operation of the voice recognition device VR3 only for any component different from the device in the first embodiment.

**[0035]** In a similar manner to the first embodiment, once the keyword detector 310 detected a keyword, the timer 320 starts counting the command input period so that the operation of the pattern comparator 211 is enabled. The time signal St outputted from the timer 320 is applied also to the volume controller 400. Based thereon, the volume controller 400 outputs a volume control signal Svc, and turns down the volume of the sound output part 910 only for the command input period.

**[0036]** By referring to FIG. 6 for flowchart, the enabler 300 and the volume controller 400 are described for their operations. Herein, any step identical in the flowchart of FIG. 2 is under the same step number, and is not described again.

**[0037]** In the third embodiment, once the timer 320 started counting and the command comparison operation is enabled in the pattern comparator 211 (S13), the volume of the sound output part 910 is turned down by the volume control signal Svc (S31). The volume of the sound output part 910 is turned back after the timer 320 finished counting (S32). In other words, the volume of the sound output part 910 is turned down only for the command input period.

**[0038]** Herein, the sound output from the sound output part 910 is turned down only for the command input period, but may be turned off. If turned down, the user can utter a command for the command input period while listening to the sound from the sound output part 910, and if turned off, the user's command can be recognized with higher accuracy, and accordingly erroneous recognition can be reduced.

**[0039]** As described in the foregoing, the volume of the sound output part 910 is turned down only for the command input period. Accordingly, such sound output therefrom for the command input period may not confuse the voice recognition device, and thus the command comparison operation in the pattern comparator 211 can be carried out with higher accuracy. This is effective for a case where the sound output from the sound output part 910 includes voice. Therefore, the voice recognition device of the second embodiment works well for controlling a sound output device such as television.

(Fourth Embodiment)

**[0040]** By referring to FIG. 7 for block diagram, described below is the configuration of a voice recognition device VR4 according to a fourth embodiment,

being connected to a target device including a sound output part, and effectively reducing erroneous recognition to a greater extent by reducing a sound output component from the target device mixing into an incoming voice. The voice recognition device VR4 is almost the same as that in the first embodiment except a sound output component suppresser 500, which is newly provided. The target device 900 connected thereto is provided with the sound output part 910 as in the third embodiment. Thus, any identical component is under the same reference numeral, and is not described again. The sound output component suppresser 500 is provided subsequent to the voice receiver 100, and is connected to the target device 900.

**[0041]** Described below is the operation of the voice recognition device VR4 only for any component different from the device in the first embodiment.

**[0042]** The sound output component suppresser 500 reduces the sound output component of the sound output part 910 mixing into a voice signal Sv provided by the voice receiver 100. Then, a voice signal Sv' with suppressed sound output component is applied to both the keyword detector 310 and the pattern comparator 211. To be more specific, the sound output component suppresser 500 receives both the voice signal Sv from the voice receiver 100 and a sound output signal Sa, which is inputted into the sound output part 910 and then outputted therefrom as the sound output. The sound output component suppresser 500 subjects these signals to a predetermined operation processing so as to reduce the sound output component mixed in the voice signal Sv. Such operation processing may vary from a simple subtraction of the sound output signal Sa, in percentages, from the voice signal Sv to a complicated operation with a transmission loss considered. Which manner is not an issue here.

**[0043]** The voice signal Sv' is applied to both the keyword detector 310 and the pattern comparator 211, and based thereon, processing is carried out in a similar manner to the first embodiment.

**[0044]** By referring to FIG. 8 for flowchart, the sound output component suppresser 500 and the enabler 300 are described for their operations. Herein, any step identical in the flowchart of FIG. 2 is provided with the same step number, and is not described again.

**[0045]** In the fourth embodiment, the sound output component mixed into the voice signal Sv is reduced (S41), and based on the voice signal Sv' with reduced sound output component, the processing is carried out in a similar manner to the first embodiment. Such processing for reducing the sound output component in the sound signal Sv is constantly carried out regardless of the command input period.

**[0046]** As such, in the fourth embodiment, the keyword detector 310 and the command detector 210 detect a keyword and a command from the voice signal Sv', respectively. Accordingly, even when the sound output from the sound output part 910 goes to the voice

receiver 100, the keyword detector 310 and the pattern comparator 211 can retain their accuracy for keyword detection and command comparison, respectively. Especially for a case where the sound output from the sound output part 910 includes voice, the voice recognition device may not confuse such voice with the user's voice. Therefore, the voice recognition device of the fourth embodiment works well for controlling a sound output device such as television. Moreover, command recognition can be done with higher accuracy in the command input period without turning down the sound output from the sound output part 910, whereby the user can utter his/her command while listening to the sound output from the target device 900. This is especially effective for a command to control the volume of the target device 900 since the user can check the volume in real time.

(Fifth Embodiment)

**[0047]** Depicted in FIG. 9 is the configuration of a voice recognition device VR5 according to a fifth embodiment, being connected to a target device including the sound output part, and provided with every characteristic component in the first to fourth embodiments.

**[0048]** As shown in FIG. 9, the voice recognition device VR5 is additionally provided with the correspondence detector 340, the volume controller 400, and the sound output component suppresser 500 compared with the device in the first embodiment. Described below is the operation of the voice recognition device VR5 of the fifth embodiment.

**[0049]** Herein, a voice signal Sv provided by the voice receiver 100 is converted into a voice signal Sv' in the sound output component suppresser 500. This is done based on a sound output signal Sa from the target device 900. Based on the voice signal Sv', the keyword detector 310 and the pattern comparator 211 each detect a keyword and a command, respectively. Once the keyword detector 310 detected the keyword and thus command is started to be accepted, the volume controller 400 turns down the volume of the sound output part 910 with the volume control signal Svc. The correspondence detector 340 receives a command signal Scm from the pattern comparator 211, and then outputs a reset signal Sr to the timer 320. In response thereto, the timer 320 starts counting the command input period again from 0. Once the timer 320 finished its counting, the volume controller 400 outputs a volume control signal Svc to turn back the volume of the sound output part 910.

**[0050]** Depicted in FIG. 10 is a flowchart for the operations of the enabler 301, the volume controller 400, and the sound output component suppresser 500. Herein, any step identical in the flowchart of FIG. 2, 4, 6, or 8 is provided with the same step number. The operation found in the flowchart of FIG. 10 is already well described in the foregoing, and is not described again.

**[0051]** As is known from the above, in the fifth embodiment, the sound output from the sound output part 910 is neither turned down nor off for a keyword input period, i.e., a period excluding the command input period, but only the sound output component mixing into the voice signal Sv is reduced. In such manner, even if the sound from the sound output device 910 is in a normal volume, the keyword can be detected with higher accuracy. For the command input period, on the other hand, the sound output from the sound output part 910 is turned down or off, and the sound output component mixing into the voice signal Sv is also reduced. Accordingly, the command recognition in the command input period is improved in accuracy, reducing erroneous recognition resulted from the sound from the target device to a greater extent.

**[0052]** Herein, the keyword can be a magic spell or nickname, being original and uncommon in the daily life. The command, however, is often found familiar in the daily life. Therefore, the command is more likely to be erroneously recognized than the keyword due to the sound from the television, for example. In this respect, as is done in this embodiment, it is preferable to turn down or off the sound output from the sound output part 910 while the voice signal Sv is reduced in the sound output component. Therefore, the voice recognition device of the fifth embodiment works well for controlling a device as television which constantly outputs sound, especially human voice, and for assuredly preventing erroneous recognition.

**[0053]** Note herein that, the voice recognition device of the fifth embodiment is the one including every characteristic component in the second to fourth embodiments, which are the correspondence detector 340, volume controller 400, and sound output component suppresser 500. As is obvious from the above, however, any arbitrary two component selected therefrom in addition to the structure in the first embodiment can surely implement the voice recognition device.

**[0054]** While the invention has been described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

## Claims

1. A voice recognition device (VR1) for controlling a target device (800) with a command uttered by a user, comprising:

voice receive means (100) for receiving a voice;

control means (200) for detecting said command in the voice (Sv) via said voice receive means (100), and controlling said target device (800) based on said detected command; and enable means (300) for detecting a predeter-

mined keyword in the voice (Sv) via said voice receive means (100), and enabling said control means (200) to control said target device (800) only for a predetermined command input period.

5

2. The voice recognition device (VR1) according to claim 1, wherein said enable means (300) further comprises:

10

keyword detect means (310) for detecting said predetermined keyword in the voice (Sv) via said voice receive means (100);  
timer means (320) for starting counting said command input period when said keyword  
detect means (310) detects said keyword; and  
comparison enable means (330) for enabling  
said control means (200) to detect said command only for a period when said timer means  
(320) is counting said command input period.

15

20

3. The voice recognition device (VR2) according to claim 1, wherein

said enable means (301) further comprises  
correspondence detect means (340) for lengthening said command input period every time  
said control means (200) detects the command in the command input period.

25

30

4. The voice recognition device (VR3) according to claim 1, further comprising volume control means (400) for turning down or off a sound output of said target device (900) for said command input period.

35

5. The voice recognition device (VR4) according to claim 1, further comprising sound output component reduction means (500) for suppressing the voice (Sv) via said voice receive means (100) in a component corresponding to the sound output of said target device (900).

40

6. A voice recognition method for the target device control with a command uttered by a user, comprising:

45

a step of receiving a voice,  
a step of detecting said command in said received voice (Sv); and  
a step (S12, S13, S14, and S15) of detecting a  
predetermined keyword in said received voice  
to enable said target device control for a predetermined command input period.

50

7. A computer readable recording medium on which a  
program to be executed on a computer is recorded  
for the target device control with a command  
uttered by a user, the program comprising:

55

a step of receiving a voice,  
a step of detecting said command in said received voice (Sv); and  
a step (S12, S13, S14, and S15) of detecting a  
predetermined keyword in said received voice  
to enable said target device control for a predetermined command input period.

FIG. 1

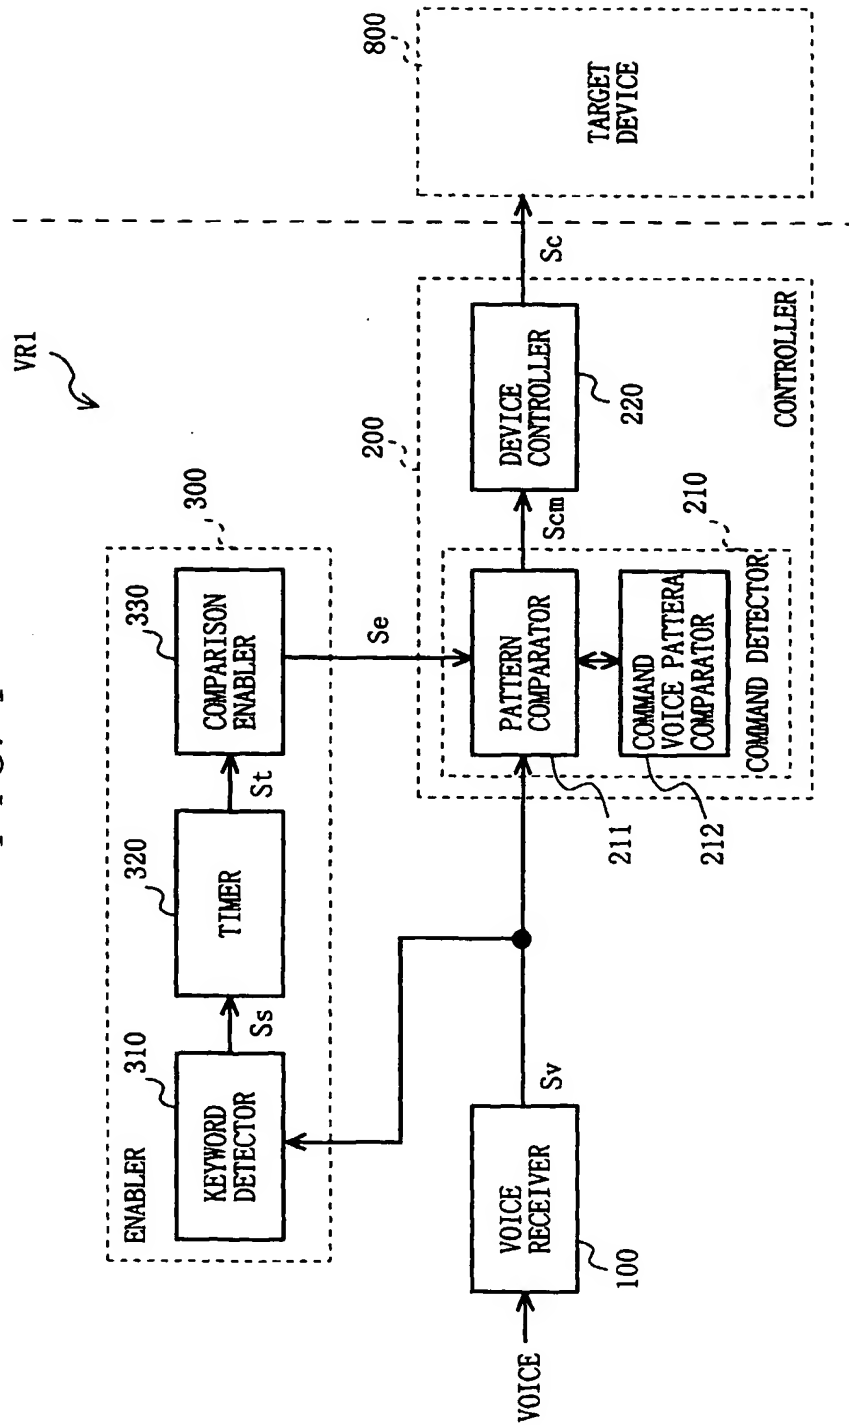




FIG. 2

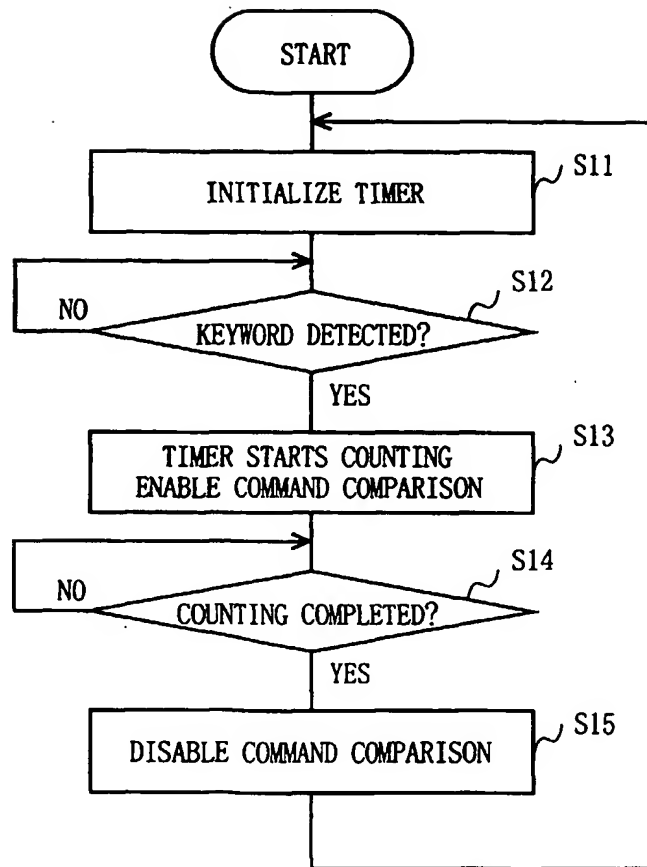


FIG. 3

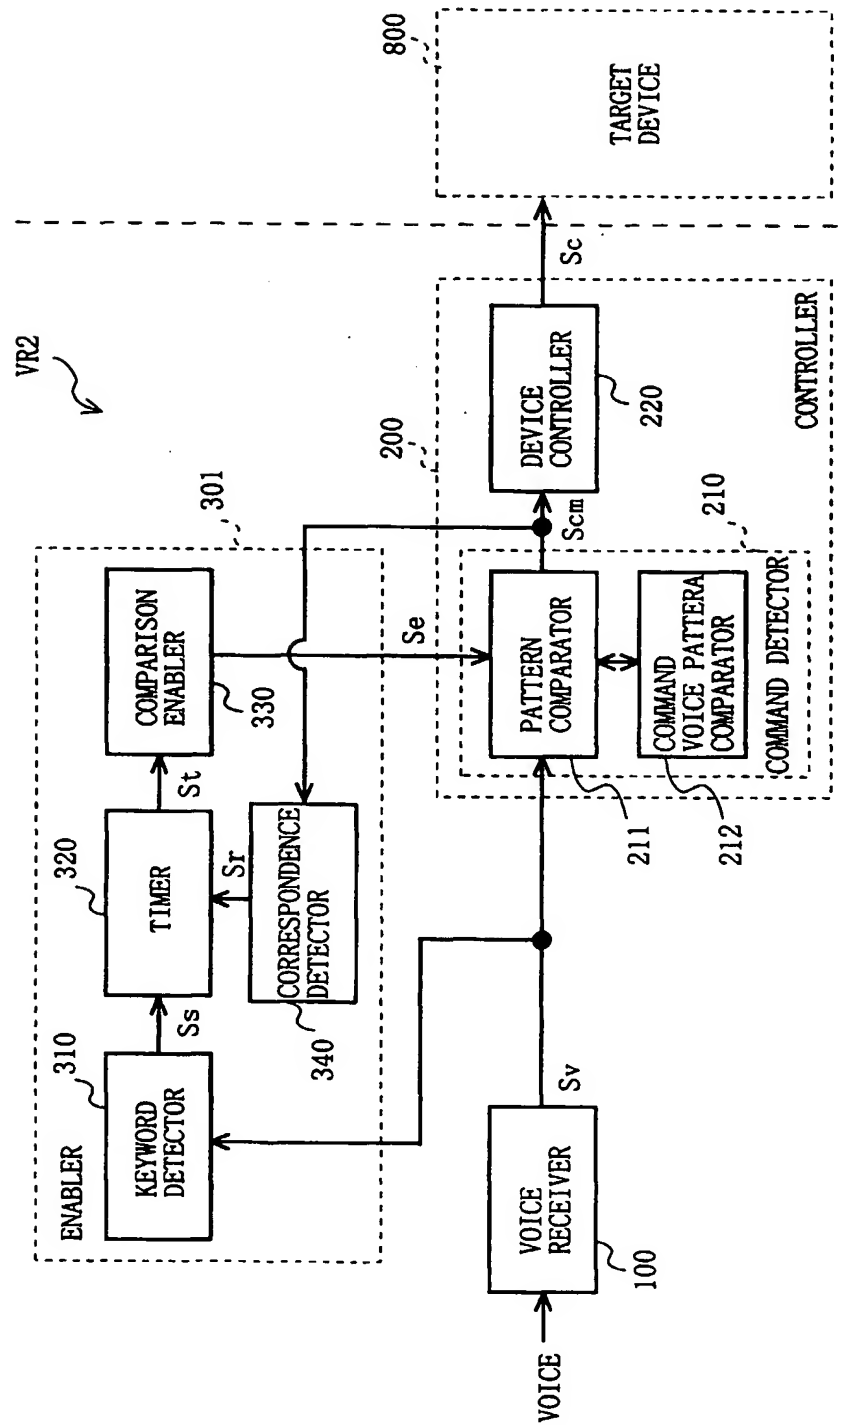


FIG. 4

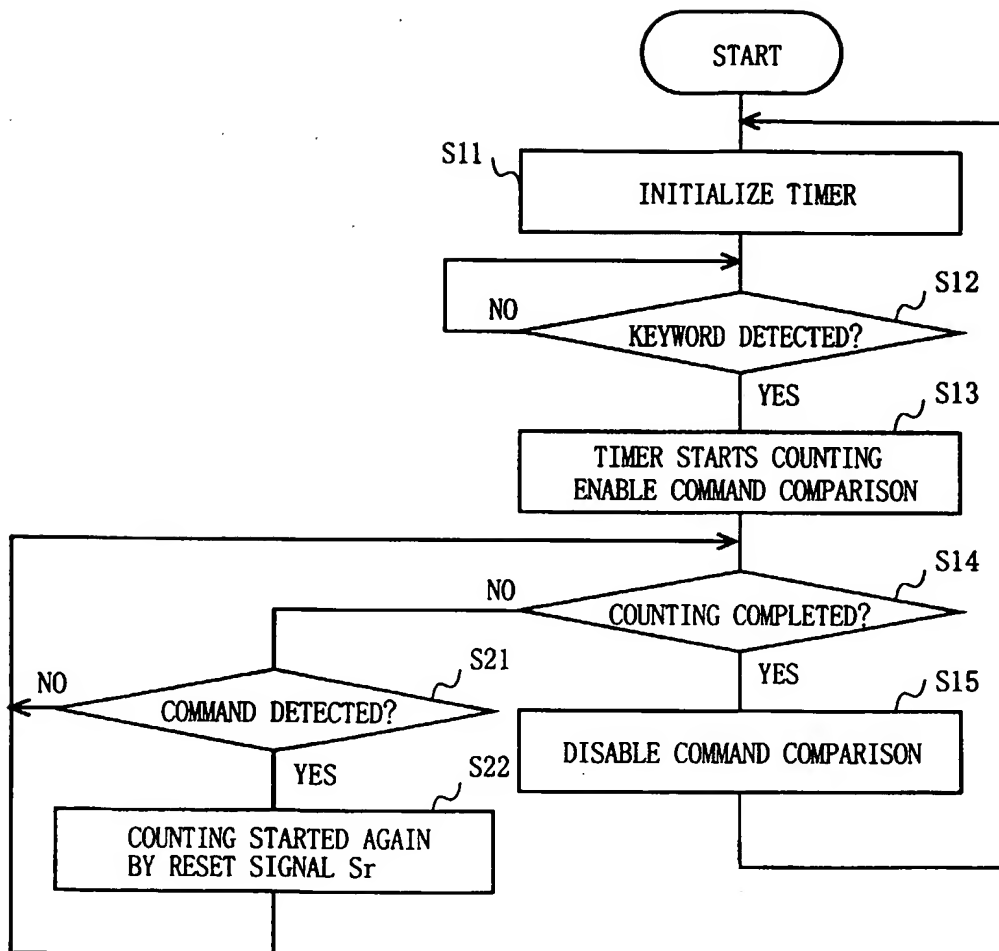


FIG. 5

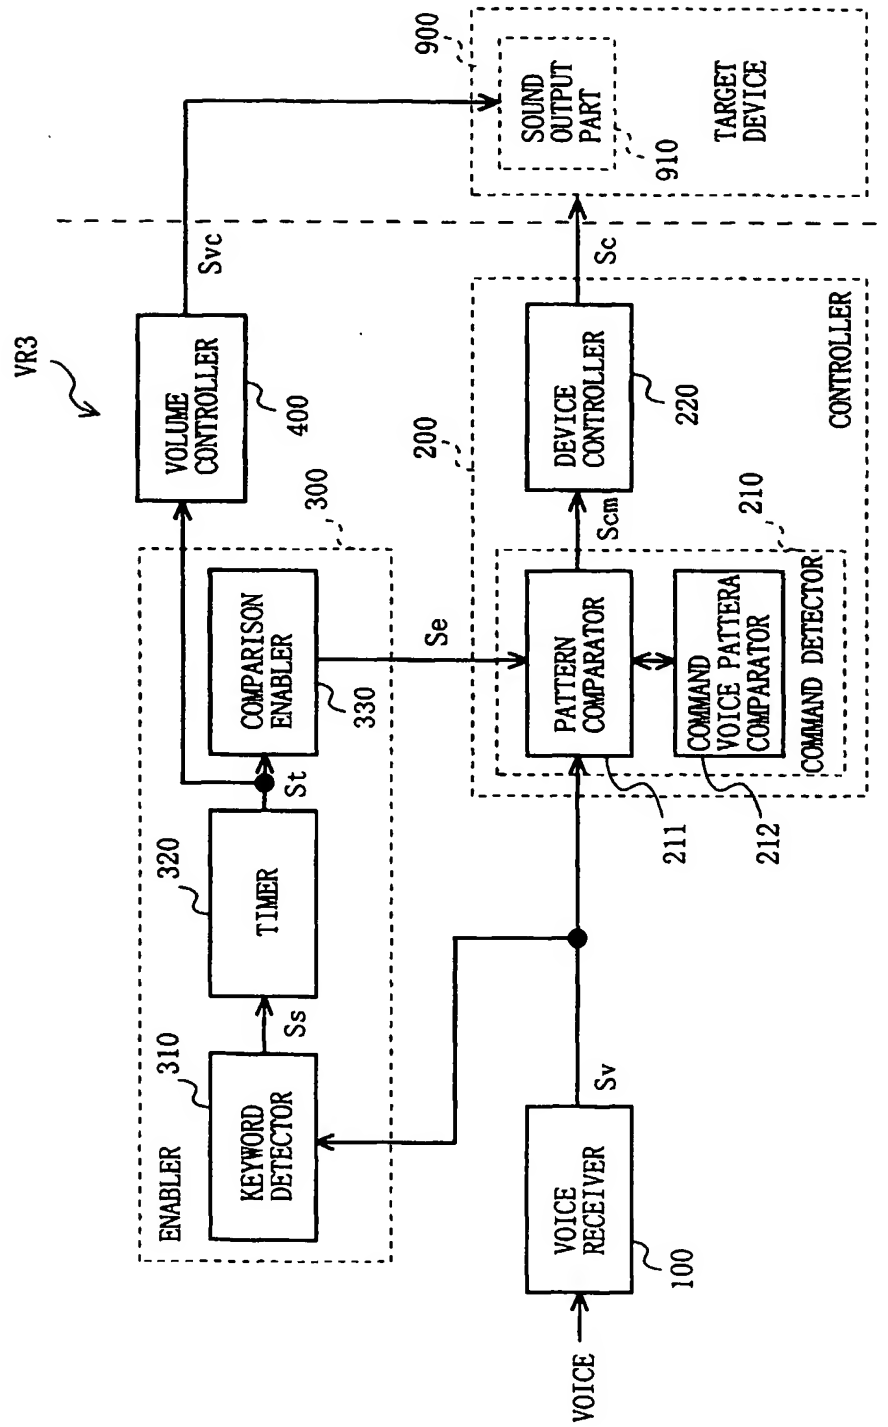


FIG. 6

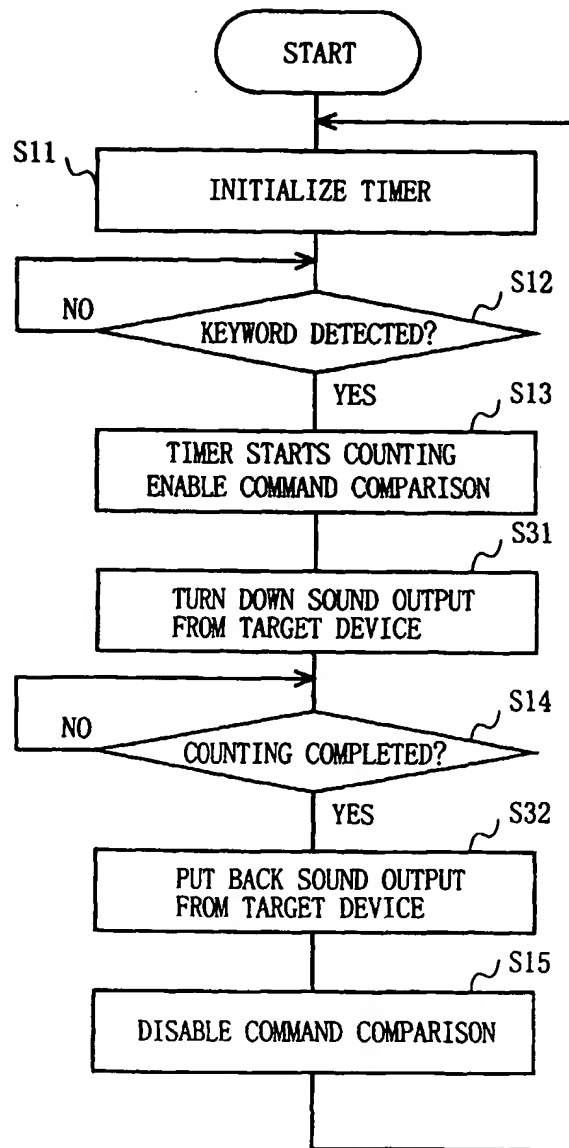


FIG. 7

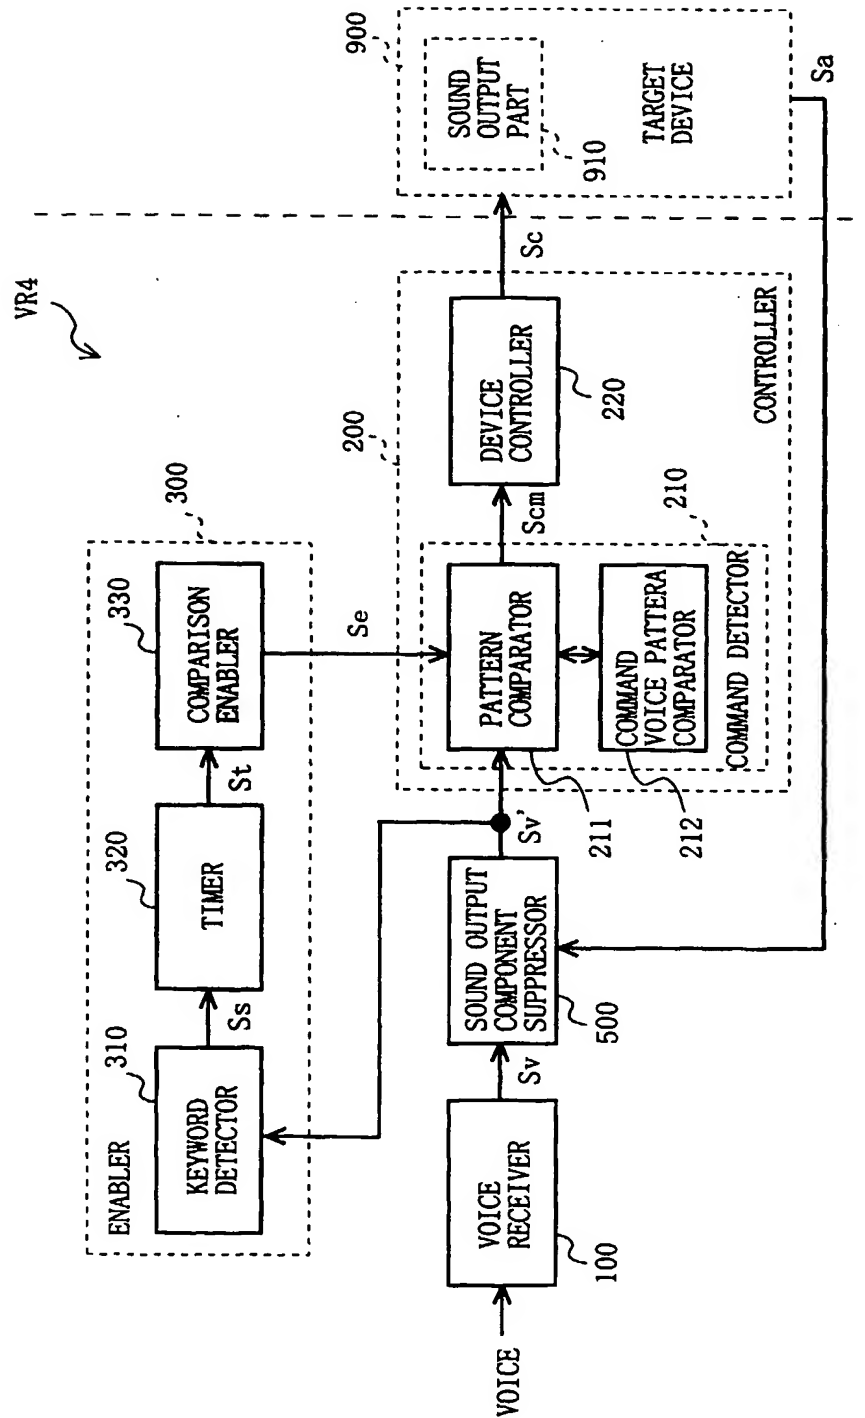


FIG. 8

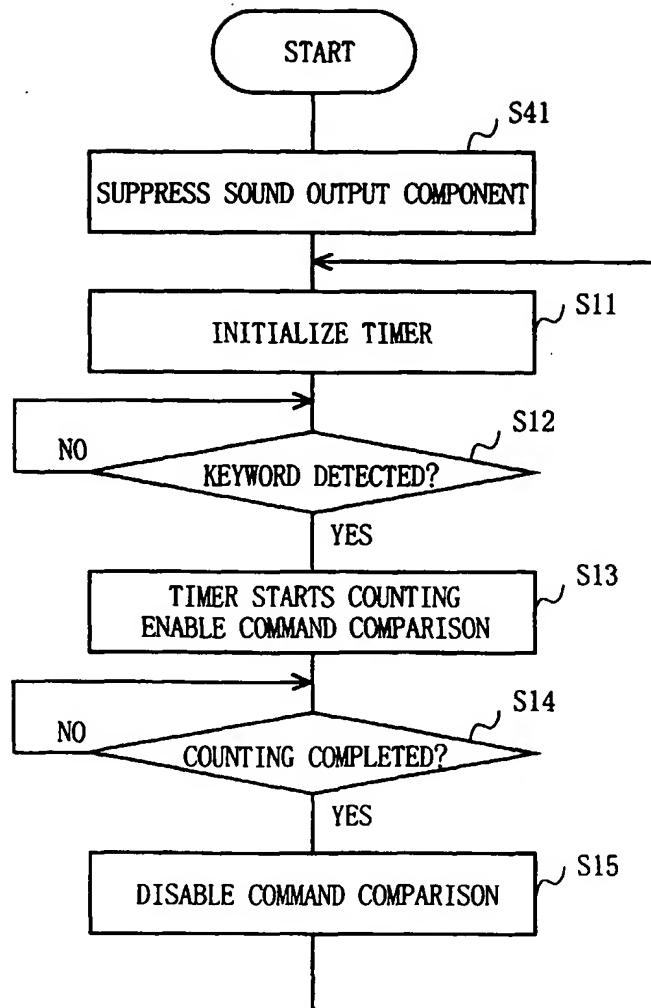


FIG. 9

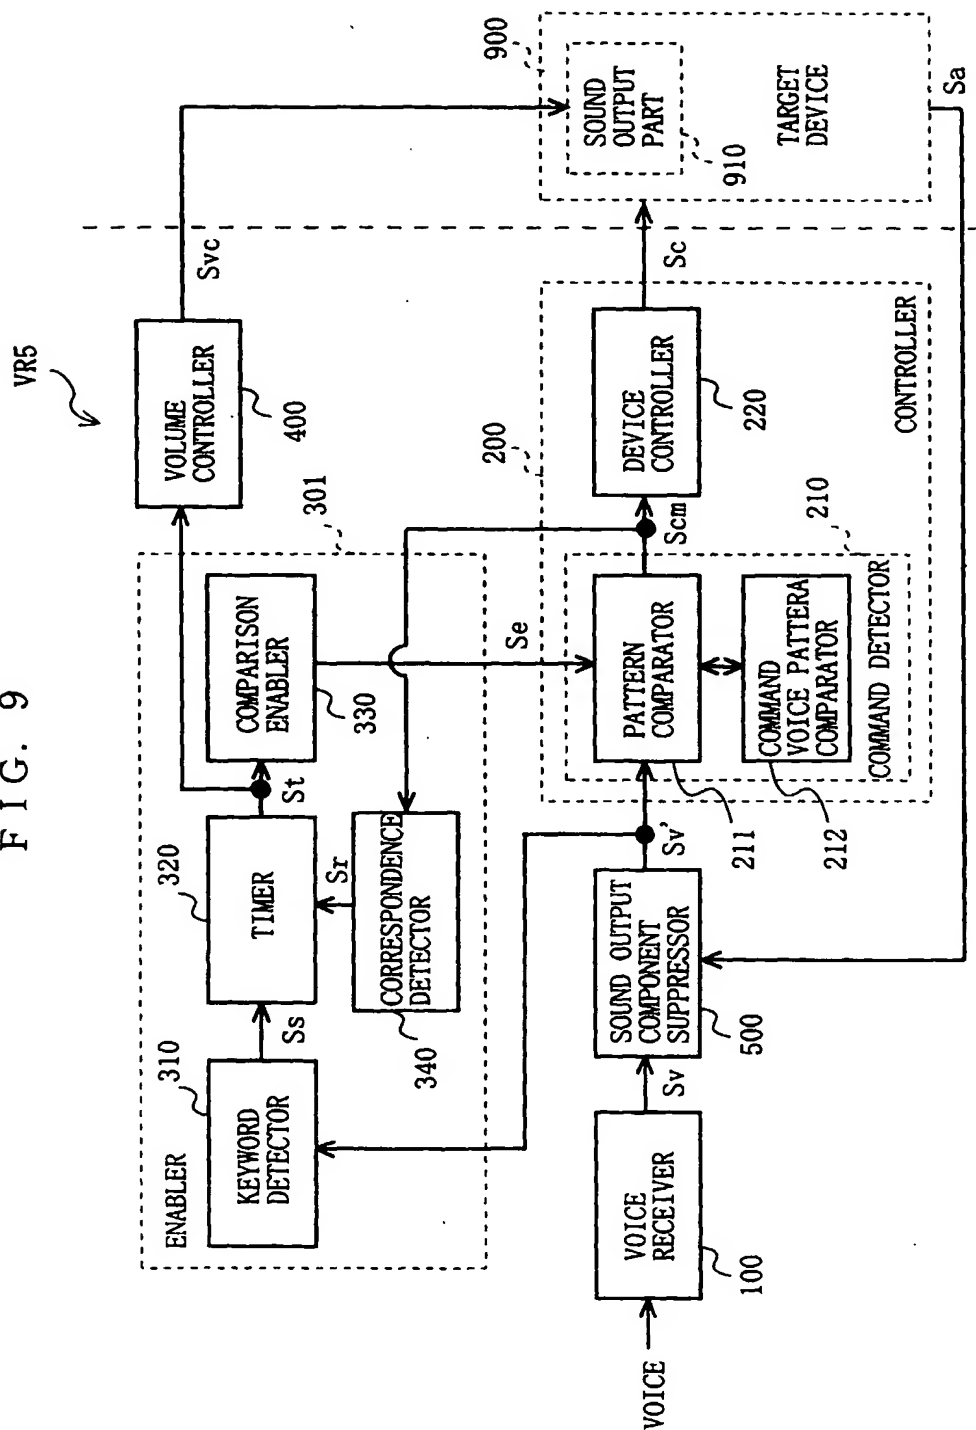




FIG. 10

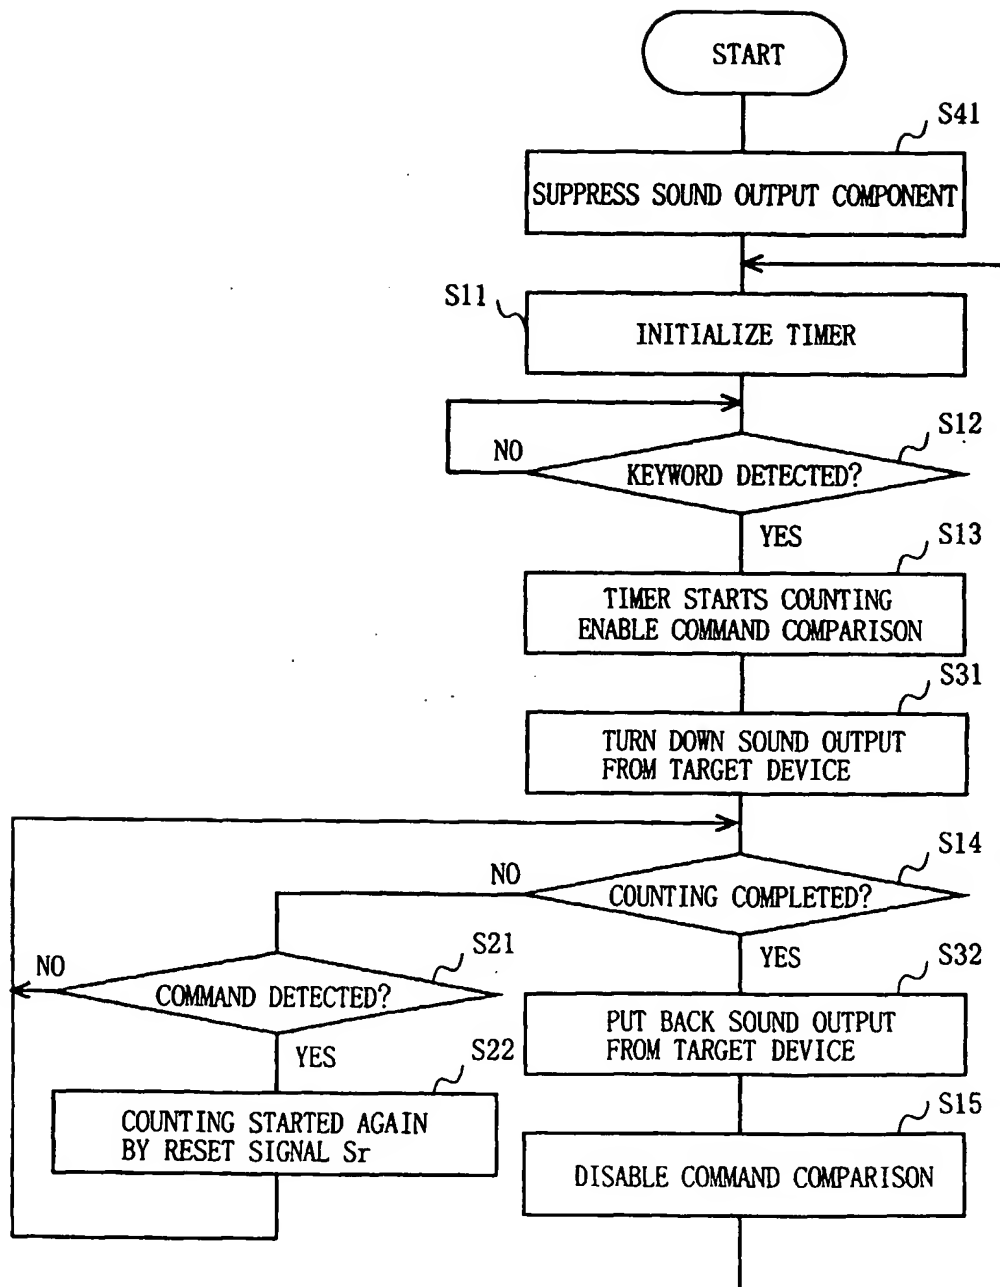


FIG. 11

